

Visit our website: [www.flowsolutions.com](http://www.flowsolutions.com)

**TECHNICAL DATA**  
**MODEL JX22SS-F**  
**BJM Pumps® SUBMERSIBLE PUMP-316 SS**  
**For High Temperature Service**  
**GENERAL DATA**

MAX. FLOW: GPM (L/min)	237 GPM (897 L/min)
MAX. HEAD: ft (m)	75' (22.8 m)
MAX. SUBMERSION DEPTH: ft (m)	65' (20m) or limited to length of power cord, Consult factory for deeper depths
PUMP TYPE	SUMP, HIGH TEMPERATURE
MINIMUM SUBMERSION DEPTH: in(mm)	11.5" (292 mm)
SOLID SIZE: in (mm)	3/8" (9.5 mm)
STRAINER OPENING	0.375" (9.5 mm) diameter
IMPELLER DIAMETER: in (mm)	5.04" (128 mm)
DISCHARGE SIZE	3" NPT-MALE
PUMP WEIGHT, without cable: lbs (kg)	87 lbs (39.6 kg)
SHIPPING WEIGHT: lbs (kg)	102 lbs (46.3 kg)

**CONSTRUCTION/MATERIAL DATA**

MECHANICAL SEAL - UPPER	CARBON/CERAMIC – VITON® elastomers
MECHANICAL SEAL - LOWER	SILICON CARBIDE/SILICON CARBIDE – VITON elastomers
MOTOR CASING	316 SS
PUMP VOLUTE	316 SS
IMPELLER- MULTI VANE	316 SS
STRAINER	316 SS
LIPSEAL & O-RINGS	VITON
ROTOR SHAFT	316 SS
EXTERNAL HARDWARE	316 SS
QTY. OIL IN MOTOR STATOR	72 U.S. FL. OZ. (2129 C.C.), OIL-FILLED W/ SHELL FM 32, NSF APPROVED
QTY. OIL IN SEAL CHAMBER	13.5 U.S. FL. OZ. (400 C.C.), SHELL FM 32, NSF APPROVED
BALL BEARING: OIL LUBRICATED UPPER	6304
BALL BEARING: OIL LUBRICATED LOWER	6305

**ELECTRICAL /MOTOR DATA**

MOTOR: TYPE, RATING HP	Submersible, Oil-Filled , Continuous Duty, 3			
MOTOR RPM	3450			
MOTOR INSULATION CLASS	R, 428°F (220°C)			
MOTOR SERVICE FACTOR	1.1			
VOLTAGE - 3 PH, 60 Hz	208V option	230V	460V	575V option
CURRENT F.L.A.	9.45	9	4.5	3.2
LOCKED ROTOR CURRENT (LRA)	57	56	28	22
MOTOR PROTECTION	THERMAL SENSOR SWITCHES EMBEDDED IN EACH WINDING PHASE, 300°F (149°C)			
POWER CORD: GAGE; LENGTH	A.W.G. 10/4; 33' (10 m), HIGH TEMP. RATED CORD			
SENSOR CABLE: GAGE; LENGTH	A.W.G. 18/4; 33' (10 m), HIGH TEMP. RATED CABLE			
MAXIMUM LIQUID TEMPERATURE	200°F (93°C)			
SEAL LEAK DETECTOR <sup>1</sup>	Seal Minder®; MOISTURE SENSING PROBE			

1- Requires a seal fail circuit in control panel for warning signal.

©2020 Industrial Flow Solutions Operating, LLC. All rights reserved.


104 John W Murphy Drive  
 New Haven, CT. 06513, USA  
 Tel: (860)399-5937 - Fax: (860)399-7784

REFER TO REVERSE SIDE FOR PUMP PERFORMANCE CURVES SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Viton® is a registered trademark of DuPont Performance Elastomers.  
 Seal Minder® is a registered trademark of Industrial Flow Solutions Operating, LLC. All rights reserved.



**MODEL: JX22SS-F**

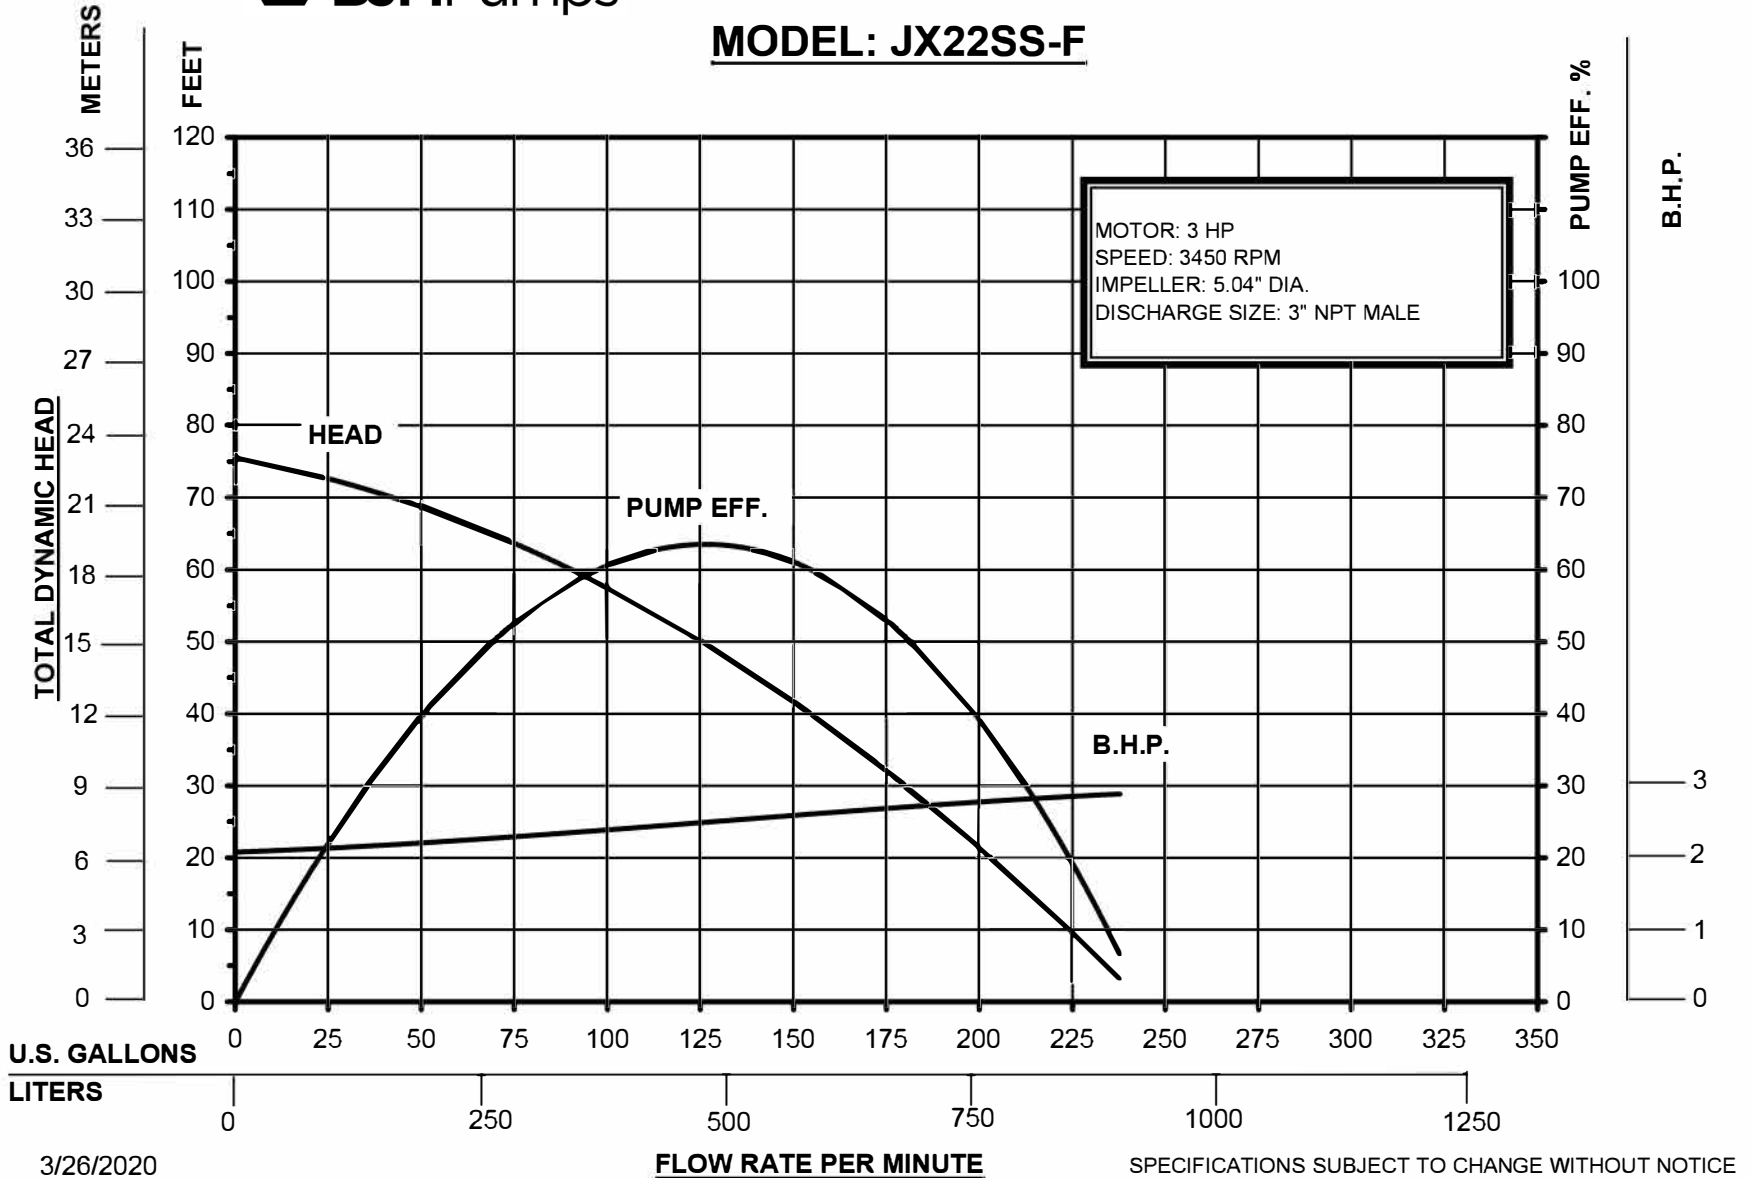

3/26/2020

**FLOW RATE PER MINUTE**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE